


# Honeywell 40 and 50 Cast Iron Body Oil Meters


Pressure loss curves and application list

## Pressure Loss

Honeywell 40 – 1½" Oil Meter

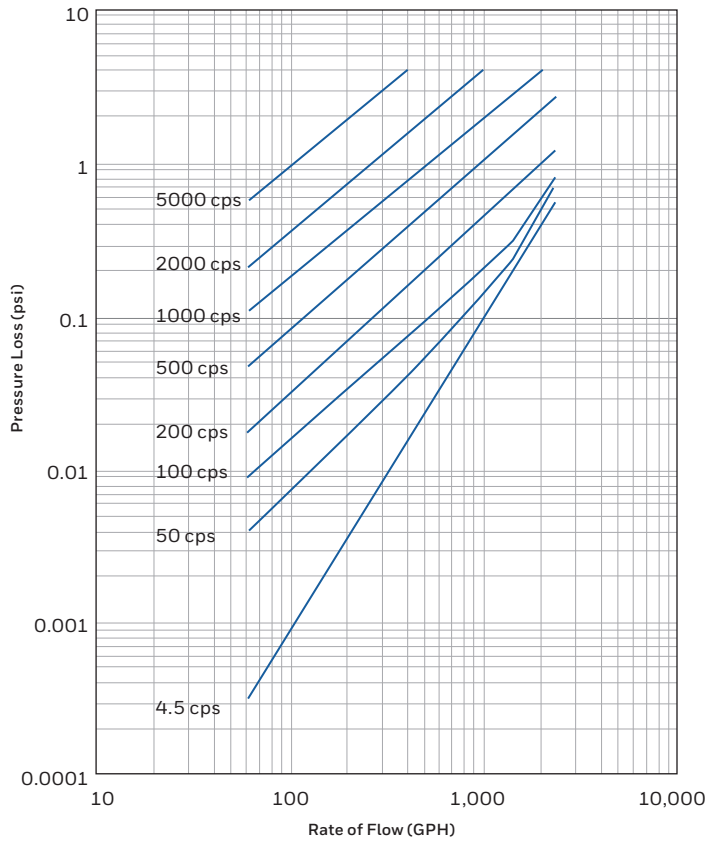

Honeywell 50 – 2" Oil Meter

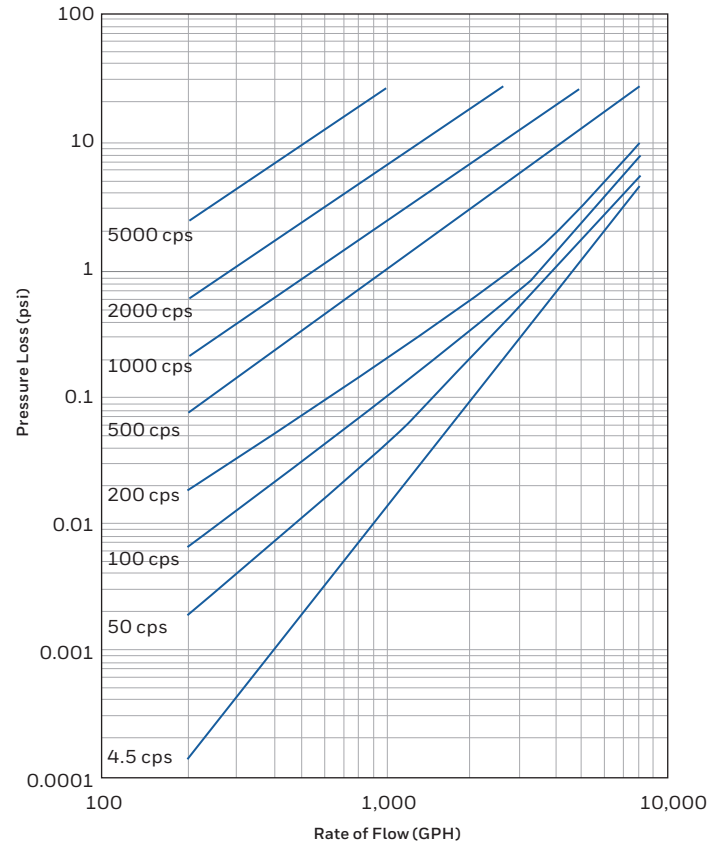

## Application List

### #2 through #4 Fuel Oils

### #5 through #6 Fuel Oils

**Note:** Suggest heating #5 - #6 oil to 200 °F in all cases  
Suggest a strainer be placed ahead of the meters, 40 mesh or better. If the application requires low head loss across the strainer suggest a basket type strainer.

### Freon #22

### SAE 30 Oil

### SAE 40 Oil

### Lube Oil

(Pressure drop may cause a problem)

### Glycol Solutions over 50% glycol

**Note:** The meter will not withstand water solutions at rest in the meter.  
The anodized aluminum piston will extract cations from the water. If the meter is to be used with water solutions, it must be drained and cleaned when idle.

No Solvents

No Toluene

No Water & Oil

### Find Out More

WaterMeters@honeywell.com  
www.elsteramcowater.com

### Honeywell Smart Energy

10 SW 49th Avenue, Bldg. 100  
Ocala, FL 34474  
T +1 800 874 0890  
F +1 352 368 1950

1100 Walker's Line, Suite 302  
Burlington, Ontario L7N 2G3  
T 866 703 7582  
F 905 634 6705

www.HoneywellSmartEnergy.com